
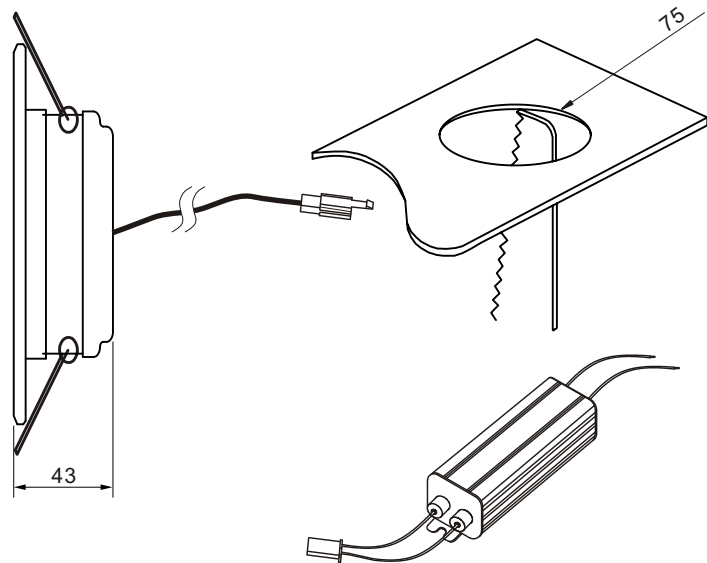


## DL08AK Series

### Ordering Informations

Model No.	Color	Size	Light Source	Luminous Intensity
DL08AKWW5W	Warm White (3,000-3,500K)	∅99x43mm	5W	300-400Lm
DL08AKNW5W	Natural white (4,000-4,500K)	∅99x43mm	5W	350-450Lm
DL08AKWE5W	Cool White (6,000-6,500K)	∅99x43mm	5W	350-450Lm

### Outline Drawing

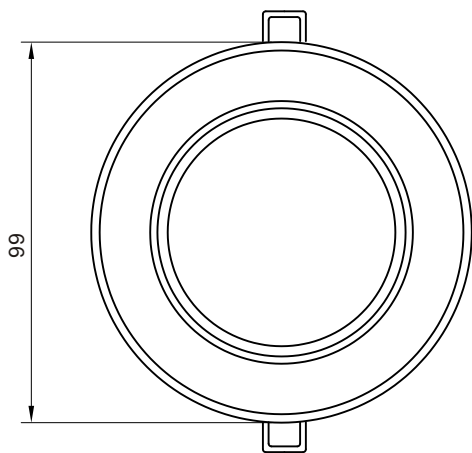

### Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- POWER FACTOR  $\geq 0.92$

\* The dimensional outline drawings are common in ( DL08AKWW5W & DL08AKNW5W & DL08AKWE5W)

Unit: mm

### Specifications

Parameter	Rating value
Size	N/A
Light source	SMD
Input Voltage	AC90-260V , 50/60Hz
Installation Diameter	75
Operating Temperature	-40 to +70 °C
Beam Angle (Adjustable tilt)	150°
Weight	300g
CRI	75-83

#### Warning:

- \* Do not look permanently to the light sources.
- \* Specified performance measured in AC90-260V 50/60Hz

