

DL13AG Series



Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
DL13AGWW10W	Warm White (3,000-3,500K)	Ø140x22mm	10W	600-700Lm
DL13AGNW10W	Natural White(4,000-4,500K)	Ø140x22mm	10W	700-800Lm
DL13AGWE10W	Cool White (6,000-6,500K)	Ø140x22mm	10W	700-800Lm

Outline Drawing




DL13AG Series

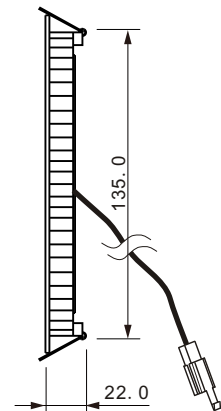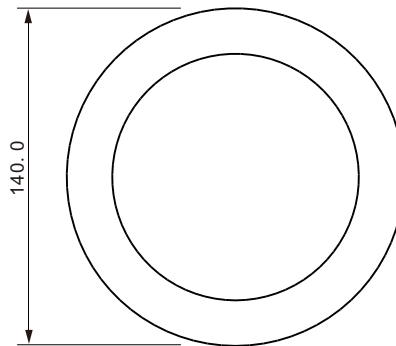

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- High efficient heat release mechanism




AC100-260V 50/60Hz
Supply unit

* The dimensional outline drawings are common in
(DL13AGWW10W & DL13AGNW10W & DL13AGWE10W)

Unit: mm

Specifications

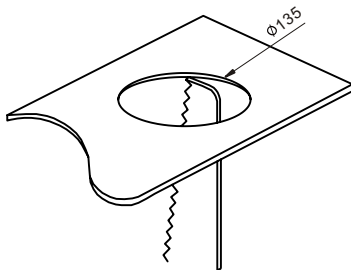

Parameter	Rating value
Light source	SMD
Input Voltage	AC100-260V 50/60Hz
Installation Diameter	Ø135
Operating Temperature	-40 to +70 °C
Beam Angle (Adjustable tilt)	150°
Weight	350g
CRI	70-80

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC100-260V 50/60Hz

