

DL17AG Series



Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
DL17AGWW12W	Warm White (3,000-3,500K)	Ø179x22mm	12W	800-900Lm
DL17AGNW12W	Natural White(4,000-4,500K)	Ø179x22mm	12W	900-1000Lm
DL17AGWE12W	Cool White (6,000-6,500K)	Ø179x22mm	12W	900-1000Lm

Outline Drawing




DL17AG Series

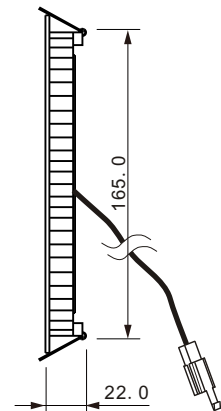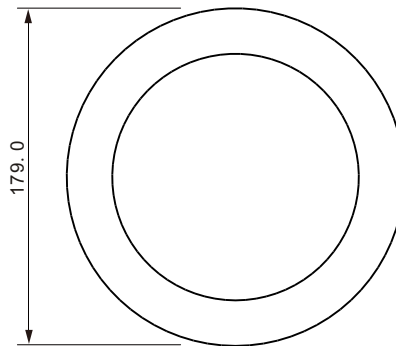

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- High efficient heat release mechanism




AC100-260V 50/60Hz
Supply unit

* The dimensional outline drawings are common in
(DL17AGWW12W & DL17AGNW12W & DL17AGWE12W)

Unit: mm

Specifications

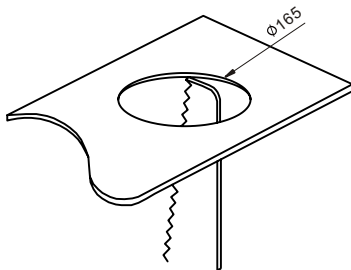

Parameter	Rating value
Light source	SMD
Input Voltage	AC100-260V 50/60Hz
Installation Diameter	Ø165
Operating Temperature	-40 to +70 °C
Beam Angle (Adjustable tilt)	150°
Weight	550g
CRI	70-80

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC100-260V 50/60Hz

