

DL18AG Series




Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
DL18AGWW16W	Warm White (3,000-3,500K)	Ø200x40mm	16W	1200-1300Lm
DL18AGNW16W	Natural White(4,000-4,500K)	Ø200x40mm	16W	1300-1400Lm
DL18AGWE16W	Cool White (6,000-6,500K)	Ø200x40mm	16W	1300-1400Lm

Outline Drawing



DL18AG Series

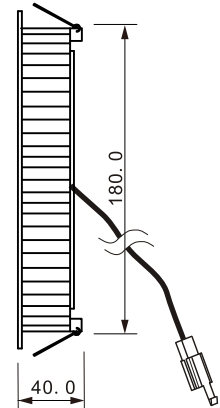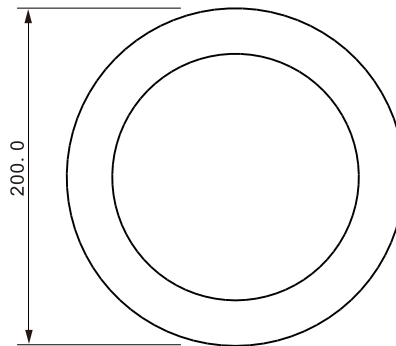

AC100-260V 50/60Hz
Supply unit

Features


- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- High efficient heat release mechanism

* The dimensional outline drawings are common in
(DL18AGWW16W & DL18AGNW16W & DL18AGWE16W)

Unit: mm

Specifications

Parameter	Rating value
Light source	SMD
Input Voltage	AC100-260V 50/60Hz
Installation Diameter	Ø180
Operating Temperature	-40 to +70 °C
Beam Angle (Adjustable tilt)	150°
Weight	650g
CRI	70-80

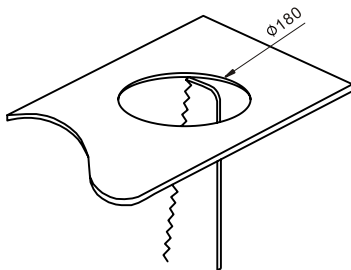

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC100-260V 50/60Hz

