

# DL6AF Series


## Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
DL6AFWW6W	Warm White (3,000-3,500K)	215 X 125mm	6x1W	520-550lm
DL6AFNW6W	Neutral White (4,500-4,750K)	215 X 125mm	6x1W	550-580lm
DL6AFWE6W	Cool White (5,500-6,500K)	215 X 125mm	6x1W	600-620lm

## Outline Drawing



DL6AF Series

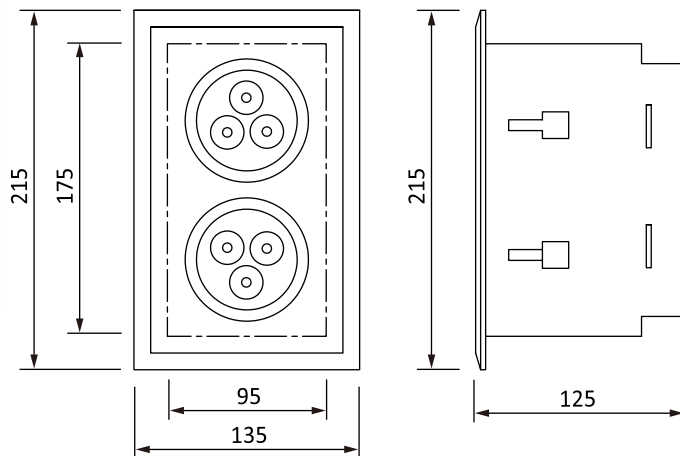

## Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- High efficient heat release mechanism
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

\* The dimensional outline drawings are common in (DL6AFWW6W, DL6AFNW6W and DL6AFWE6W)

Unit: mm

## Specifications

Parameter	Rating value
Power Consumption	6W
Input Voltage	AC 85-260V, 50/60Hz
Light Source	6W power LED
Operating Temperature	-40 to +70°C
Beam Angle	45°
CRI	85
Weight	1,000g
Body / Finish Color	Aluminium

### Warning:

- \* Do not look permanently to the light sources
- \* Specified performance measured in AC 85-260V

