

HB060A Series


Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
HB060AWW01	Warm White (3,000-3,500K)	Ø415 x 592mm	60W	5500-6000Lm
HB060ANW01	Neutral White (4,500-4,750K)	Ø415 x 592mm	60W	6000-6500Lm
HB060AWE01	Cool White (5,500-6,500K)	Ø415 x 592mm	60W	6000-6500Lm



HB060A Series

Outline Drawing

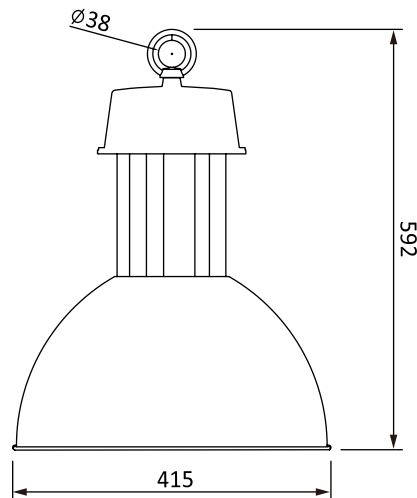

* The dimensional outline drawings are common in (HB060AWW01, HB060ANW01 and HB060AWE01)

Unit: mm

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- High efficient heat release mechanism
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

Specifications

Parameter	Rating value
Power Consumption	60W
Input Voltage	AC 110-260V, 50/60Hz
Light Source	60W power LED
Operating Temperature	-40 to +70°C
Beam Angle	45°
CRI	85
Weight	5.5kg
Body / Finish Color	Aluminium

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC 110-260V

