

KS80-112 Series


Ordering Informations

| Model no. | Color | Size | Light Source | Luminous Intensity |
|------------|---------------------------|------------------|--------------|--------------------|
| KS80-112WW | Warm White (3,000-3,500K) | 670 x 305 x 80mm | 112W | 9,800-9,900lm |
| KS80-112WE | Cool White (6,000-6,500K) | 670 x 305 x 80mm | 112W | 10,100-10,200lm |



KS80-112 Series

Outline Drawing

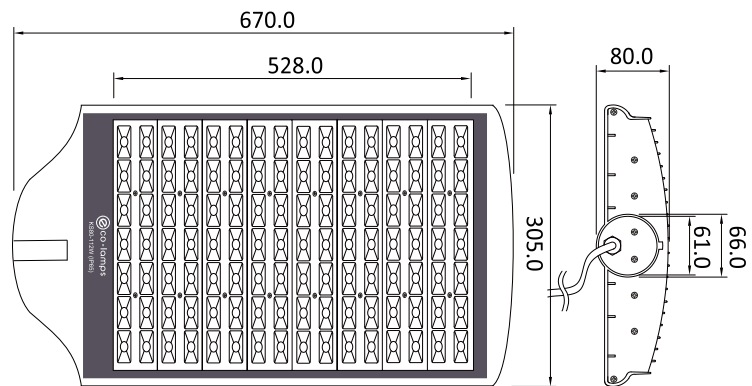

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

* The dimensional outline drawings are common in (KS80-112WW and KS80-112WE)

Unit: mm

Specifications

| Parameter | Rating value |
|-----------------------|----------------------|
| Power Consumption | 127W |
| Input Voltage | AC 170-250V, 50/60Hz |
| Installation Diameter | 61.0mm |
| Light Source | 112x1W power LED |
| Operating Temperature | - 35 to +50°C |
| IP Level | IP65 |
| Weight | 6.3kg |
| CRI | 85 |
| Body / Finish color | Aluminium Alloy |

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC 170-250V

