

KS80-56 Series


Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
KS80-56WW	Warm White (3,000-3,500K)	505 x 305 x 80mm	56W	4,900-5,000lm
KS80-56WE	Cool White (6,000-6,500K)	505 x 305 x 80mm	56W	5,100-5,200lm

Outline Drawing



KS80-56 Series

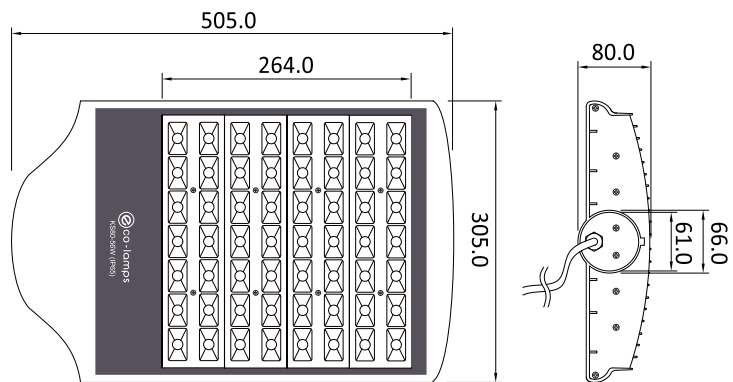

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

* The dimensional outline drawings are common in (KS80-56WW and KS80-56WE)

Unit: mm

Specifications

Parameter	Rating value
Power Consumption	63W
Input Voltage	AC 170-250V, 50/60Hz
Installation Diameter	61.0mm
Light Source	56x1W power LED
Operating Temperature	- 35 to +50°C
IP Level	IP65
Weight	4.5kg
CRI	85
Body / Finish color	Aluminium Alloy

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC 170-250V

