

KS80-70 Series


Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
KS80-70WW	Warm White (3,000-3,500K)	505 x 305 x 80mm	70W	5,900-6,000lm
KS80-70WE	Cool White (6,000-6,500K)	505 x 305 x 80mm	70W	6,100-6,200lm

Outline Drawing



KS80-70 Series

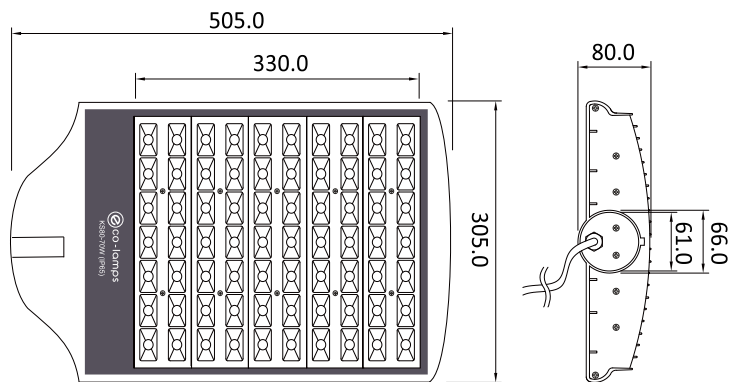

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

* The dimensional outline drawings are common in (KS80-70WW and KS80-70WE)

Unit: mm

Specifications

Parameter	Rating value
Power Consumption	77W
Input Voltage	AC 170-250V, 50/60Hz
Installation Diameter	61.0mm
Light Source	70x1W power LED
Operating Temperature	- 35 to +50°C
IP Level	IP65
Weight	4.6kg
CRI	85
Body / Finish color	Aluminium Alloy

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC 170-250V

