

# KS80-84 Series


## Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
KS80-84WW	Warm White (3,000-3,500K)	535 x 305 x 80mm	84W	6,900-7,000lm
KS80-84WE	Cool White (6,000-6,500K)	535 x 305 x 80mm	84W	7,100-7,200lm

## Outline Drawing



KS80-84 Series

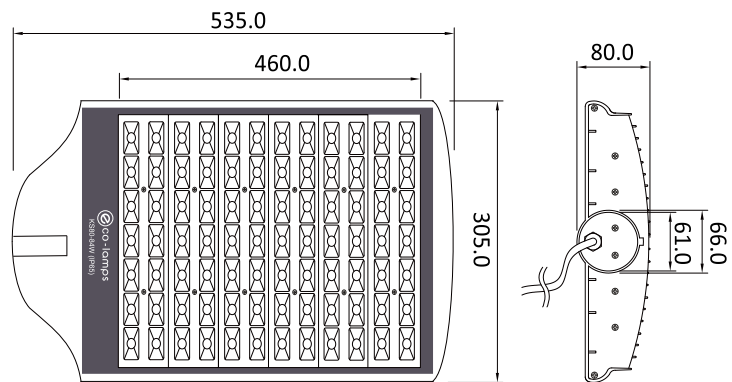

## Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

\* The dimensional outline drawings are common in (KS80-84WW and KS80-84WE)

Unit: mm

## Specifications

Parameter	Rating value
Power Consumption	95W
Input Voltage	AC 170-250V, 50/60Hz
Installation Diameter	61.0mm
Light Source	84x1W power LED
Operating Temperature	- 35 to +50°C
IP Level	IP65
Weight	4.9kg
CRI	85
Body / Finish color	Aluminium Alloy

### Warning:

- \* Do not look permanently to the light sources
- \* Specified performance measured in AC 170-250V

