


SL1Y Series

Ordering Informations


Model No.	Color	Size	Light Source	Luminous Intensity
SL1YWW1W	Warm White (3,000-3,500K)	ø67x34mm	1W	90-100Lm
SL1YWE1W	Cool White (6,000-6,500K)	ø67x34mm	1W	100-110Lm

Outline Drawing

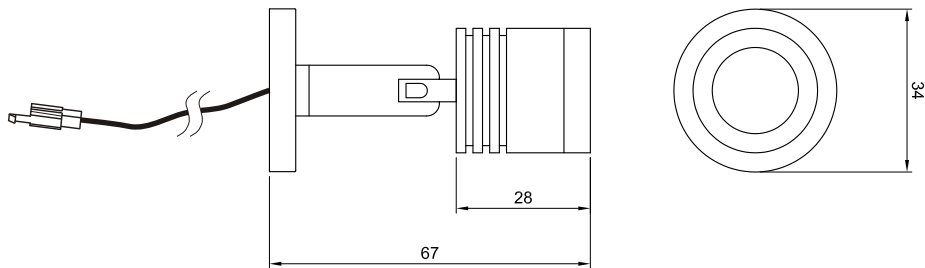

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

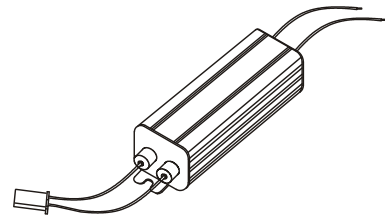

* The dimensional outline drawings are common in (SL1YWW1W & SL1YWE1W)

Unit: mm

Parameter	Rating value
Forward Current	350mA
Input voltage	AC 85-260V 50/60Hz
Installation Diameter	N/A
Light source	1x1W
Operating temperature	-40 - +70deg
Viewing angle	30deg
Weight	70g

Important:

- * Do not look permanently to the light sources.
- * Specified performance measured in 85-260V range.

