


## T5DS120 Series

### Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
T5DS120WW01	Warm White (3,000-3,500K)	Ø16x1162mm	14W	1200-1300Lm
T5DS120NW01	Natural White(4,000-4,500K)	Ø16x1162mm	14W	1300-1400Lm
T5DS120WE01	Cool White (6,000-6,500K)	Ø16x1162mm	14W	1300-1400Lm

### Outline Drawing

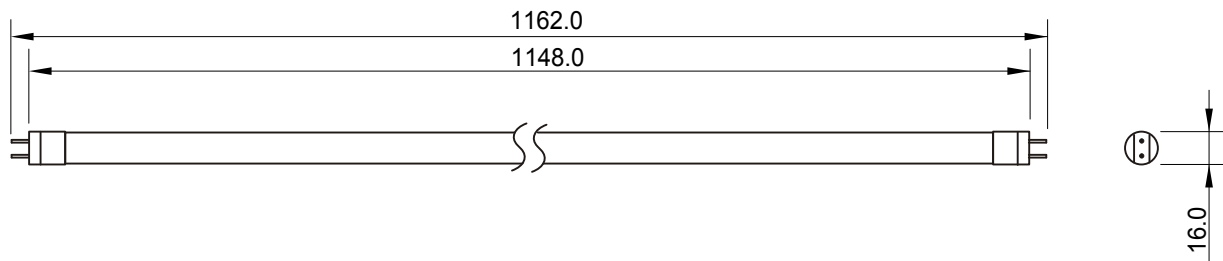

### Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

\* The dimensional outline drawings are common in (T5DS120WW01 & T5DS120WE01 & T5DS120NW01) Unit: mm

### Specifications

Parameter	Rating value
Light source	SMD
Input Voltage	AC100-240V 50/60Hz
Installation Diameter	N/A
Operating Temperature	-40 to +70 °C
Beam Angle (Adjustable tilt)	120°
Weight	250g
CRI	85

#### Important:

- \* Do not look permanently to the light sources.
- \* Specified performance measured in AC100-240V 50/60Hz

