

T5S090 Series


Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
T5S090WW01	Warm White (3,000-3,500K)	900x22x26.5mm	10W	950-1050Lm
T5S090NW01	Natural White(4,000-4,500K)	900x22x26.5mm	10W	1000-1100Lm
T5S090WE01	Cool White (6,000-6,500K)	900x22x26.5mm	10W	1000-1100Lm

Outline Drawing



T5S090 Series

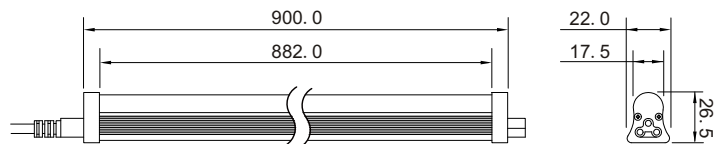

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

* The dimensional outline drawings are common in (T5S090WW01 & T5S090NW01 & T5S090WE01)

Unit: mm

Specifications

Parameter	Rating value
Light source	SMD
Input Voltage	AC180-260V 50/60Hz
Installation Diameter	N/A
Operating Temperature	-40 to +70°C
Beam Angle (Adjustable tilt)	180°
Weight	320g
CRI	70-80

Important:

- * Do not look permanently to the light sources.
- * Specified performance measured in AC180-260V 50/60Hz.

