

## T5S120 Series


### Ordering Informations

| Model no.  | Color                       | Size           | Light Source | Luminous Intensity |
|------------|-----------------------------|----------------|--------------|--------------------|
| T5S120WW01 | Warm White (3,000-3,500K)   | 1200x22x26.5mm | 14W          | 1300-1400Lm        |
| T5S120NW01 | Natural White(4,000-4,500K) | 1200x22x26.5mm | 14W          | 1400-1500Lm        |
| T5S120WE01 | Cool White (6,000-6,500K)   | 1200x22x26.5mm | 14W          | 1400-1500Lm        |

### Outline Drawing



T5S120 Series

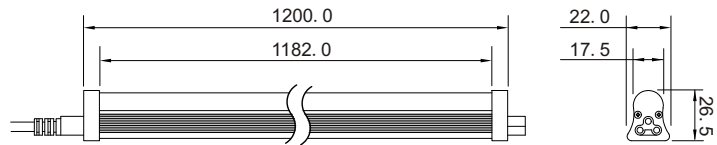

### Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

\* The dimensional outline drawings are common in (T5S120WW01 & T5S120NW01 & T5S120WE01 )

Unit: mm

### Specifications

| Parameter                    | Rating value       |
|------------------------------|--------------------|
| Light source                 | SMD                |
| Input Voltage                | AC180-260V 50/60Hz |
| Installation Diameter        | N/A                |
| Operating Temperature        | -40 to +70°C       |
| Beam Angle (Adjustable tilt) | 180°               |
| Weight                       | 420g               |
| CRI                          | 70-80              |

### Important:

- \* Do not look permanently to the light sources.
- \* Specified performance measured in AC180-260V 50/60Hz.

