


UGL-HC070 Series

Ordering Informations

Model No.	Color	Size	Light Source	Luminous Intensity
UGL-HC070WW	Warm White (3,000-3,500K)	Ø166x125mm	7x1W	410-450lm
UGL-HC070WE	Cool White (6,000-6,500K)	Ø166x125mm	7x1W	450-500lm

Outline Drawing

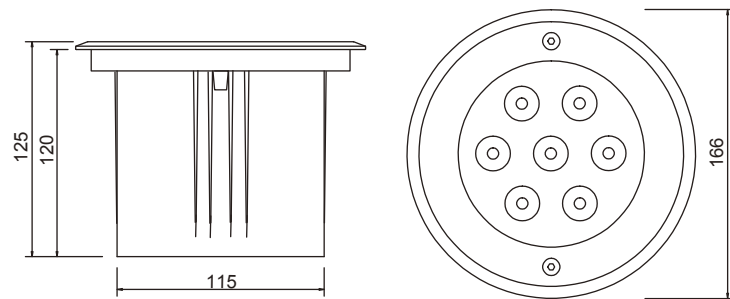

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- Weatherproof performance IP67
- Low surface heat against hand touch
- No UV or IR damage light sensitive items

* The dimensional outline drawings are common in (UGL-HC070WW and UGL-HC070WE)

Unit: mm

Specifications

Parameter	Rating value
Power Consumption	7W
Input Voltage	AC 85-220V, 50/60Hz
Light Source	7x1W power LED
Operating Temperature	- 40 to +70°C
Beam Angle	45°
Weight	950g
CRI	85
IP level	IP67

Warning:

- * Do not look permanently to the light sources.
- * Specified performance measured in 85-220Vac.

